

Connecting O.E. circuits to leisure battery

T5

Begin by removing the lower dash panel on the passenger side and the centre lower panel under the gearstick.

Remove the lower fuse box. Locate the fuse for the circuit that you want to convert.

Confirm by testing circuit after pulling fuse.

Once you have the correct fuse turn the fuse box over and find the wires on the back of the fuse that you have removed. Using a test lamp or multi meter find the red wire that has 12 volts on it and cut this wire about 75 mm from the fuse box. Insulate the end that is coming from the loom.


Now, connect the new wire to the short end of the red wire attached to the fuse box. Secure the new wire to the existing loom with a cable tie and run this wire to your leisure battery through the black plastic tunnel in the centre of the floor beneath the rubber mat.

Connect to the leisure battery + or fuse box.

Replace fuses and re-fit the lower fuse box.

For interior lights.

Behind dash end panel on near side (RHD only) you will find a light brown connector block. Remove the plug and cut the red/black wire as in the second photo. Connect new wire to the red/black in the loom and insulate the end from the plug. Follow previous instructions for routing new cable to battery.

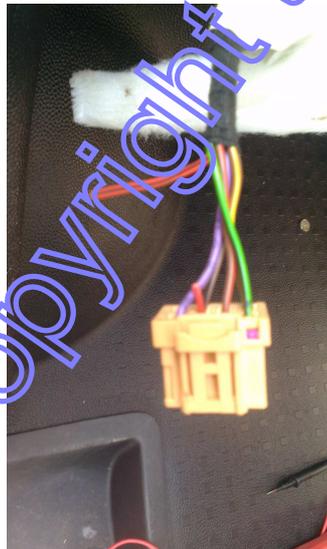

T4

The radio and interior light circuits are easy to convert. Fuse 21 is the radio/interior lights and fuse 22 is the cig lighter. Remove the fuse from the circuit that you wish to convert. Attach a male spade connector to the supplied cable. Insert the male spade into the top slot left vacant by the removed fuse. Connect the fused end of the supplied cable to your leisure battery.

If you have a Caravelle or Multivan with sockets in the rear the fuse for these sockets will be on the underside of the main fuse box. Locate the fuse for the socket that you wish to convert and remove the fuse.

Using a test lamp or mutli meter determine which is the wire that has 12 volts supplying the fuse slot. Cut this wire about 75 mm from the fuse slot. Insulate the live end.

Using the supplied connector attach your new cable to the wire feeding the fuse slot. Attach the fused end of the supplied cable to your leisure battery.



If you have any difficulty please phone Martyn on 07971 165747.

travelvolts.com accepts no liability for injury or damage caused by the incorrect fitment or use of this product.